QC*glass*

A - HORIZONTAL JOINT (vertical application)

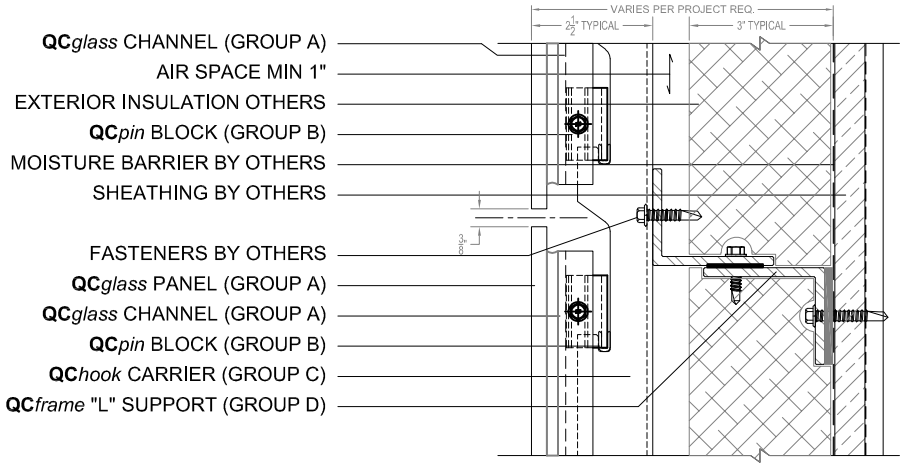

B - VERTICAL JOINT (vertical application)

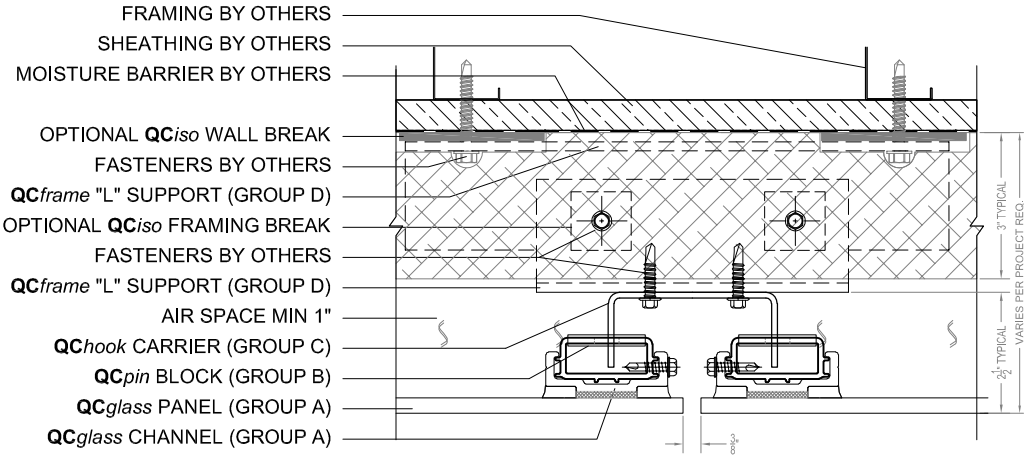

C-PARAPET CONDITION (vertical panel application)

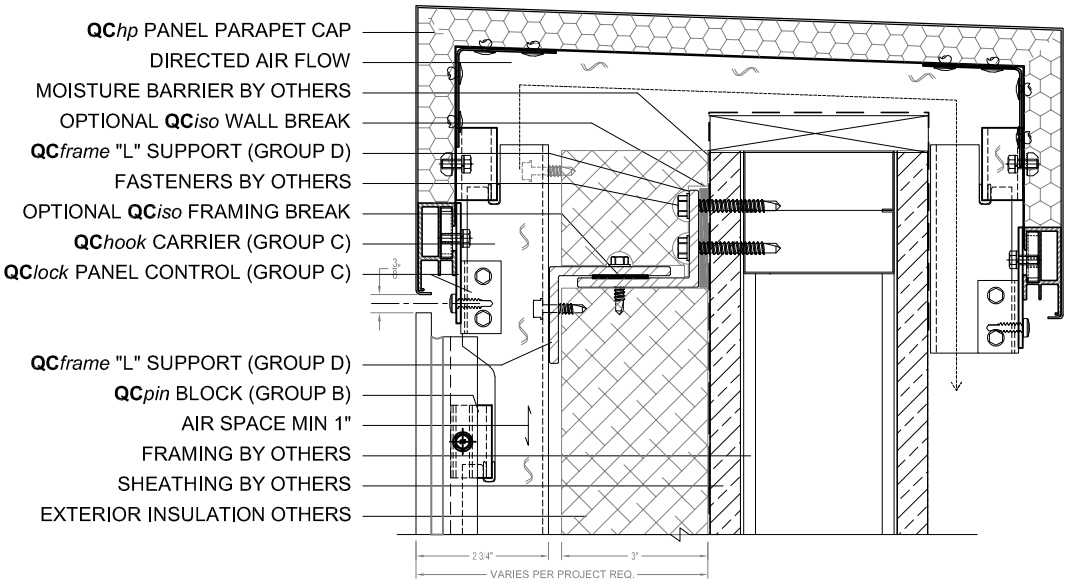

QC*GLASShp* Panel (Group A)
QC*GLASShp* Channel (Group A)



QC*pin* Block (Group B)



QC*hook* Carrier (Group C)

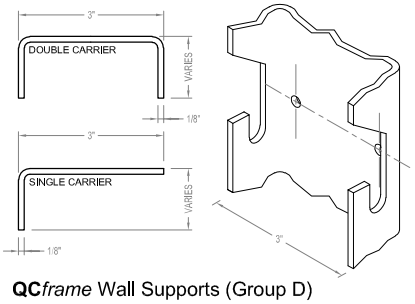

QC*frame* Wall Supports (Group D)



QC*iso* Thermal Break (Group E)

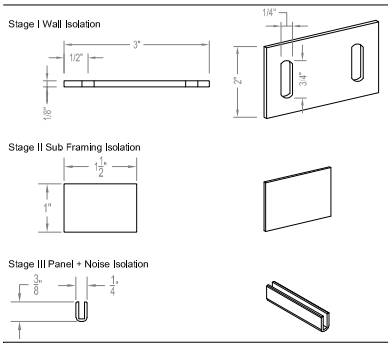

NOBLE SCALE		
Magnesium	-1.6 thru -1.7	Least Noble
Zinc	-1.0 thru -1.1	Most compatible to Aluminum
Aluminum	-0.75 thru -1.0	
Mild Steel	-0.6 thru -0.7	
Copper	-0.3 thru -0.4	
Stainless Steel 410 & 416	-0.25 thru -035	
Nickel	-0.1 thru -0.2	
Stainless Steel 302 & 304	0.0 thru -0.1	
Titanium	0.05 thru -0.15	
Gold / Platinum	0.2 thru 0.1	Most Noble

Designer note:
This document describes the essential system components. In addition, hardware may be added or subtracted from the system based on engineering needs and as depicted in QCF formally submitted shop drawings.

QC*glass*

D-BOTTOM OF WALL (vertical application)

FRAMING BY OTHERS
SHEATHING BY OTHERS
MOISTURE BARRIER BY OTHERS
EXTERIOR INSULATION OTHERS
AIR SPACE MIN 1"
QC*frame* "L" SUPPORT (GROUP D)
OPTIONAL **QC***iso* FRAMING BREAK
QC*hook* CARRIER (GROUP C)
FASTENERS BY OTHERS
OPTIONAL **QC***iso* WALL BREAK
QC*glass* PANEL (GROUP A)
QC*pin* BLOCK (GROUP B)
QC*glass* CHANNEL (GROUP A)

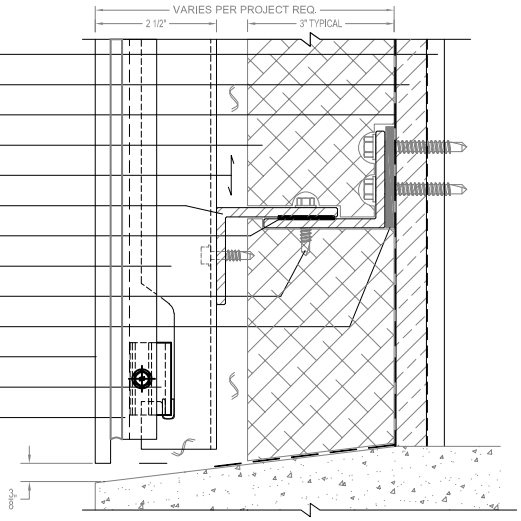

D-BOTTOM OF WALL (vertical application)

MOISTURE BARRIER BY OTHERS
SHEATHING BY OTHERS
FRAMING BY OTHERS
AIR SPACE MIN 1"
OPTIONAL **QC***iso* FRAMING BREAK
QC*frame* "L" SUPPORT (GROUP D)
QC*hook* CARRIER (GROUP C)
FASTENERS BY OTHERS
QC*glass* CHANNEL (GROUP A)
OPTIONAL **QC***iso* WALL BREAK
QC*pin* BLOCK (GROUP B)

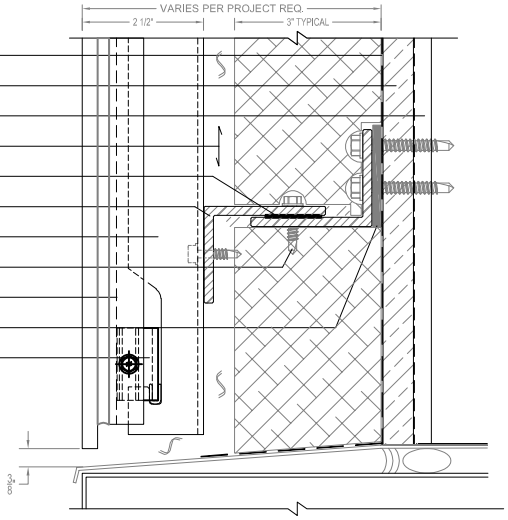

F-WINDOW JAMB (vertical application)

FRAMING BY OTHERS
SHEATHING BY OTHERS
MOISTURE BARRIER BY OTHERS
OPTIONAL **QC***iso* WALL BREAK
FASTENERS BY OTHERS
EXTERIOR INSULATION OTHERS
OPTIONAL **QC***iso* FRAMING BREAK
QC*frame* "L" SUPPORT (GROUP D)
QC*glass* CHANNEL (GROUP A)
QC*pin* BLOCK (GROUP B)
AIR SPACE MIN 1"
QC*glass* CHANNEL (GROUP A)
QC*glass* PANEL (HP SYSTEM)

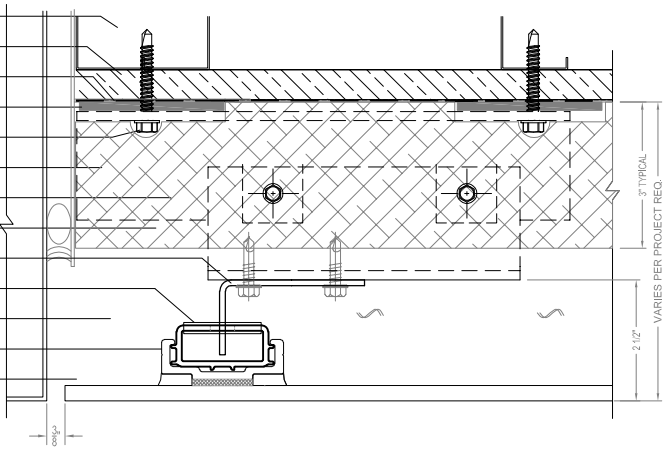

QC*GLASShp* Panel (Group A)
QC*GLASShp* Channel (Group A)



QC*pin* Block (Group B)



QC*hook* Carrier (Group C)

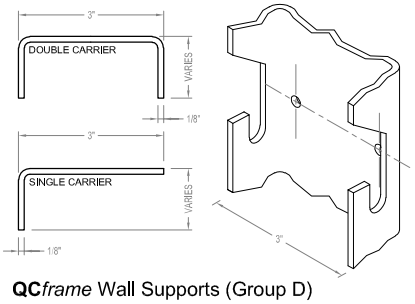

QC*frame* Wall Supports (Group D)



QC*iso* Thermal Break (Group E)





NOBLE SCALE		
Magnesium	-1.6 thru -1.7	Least Noble
Zinc	-1.0 thru -1.1	Most compatible to Aluminum
Aluminum	-0.75 thru -1.0	
Mild Steel	-0.6 thru -0.7	
Copper	-0.3 thru -0.4	
Stainless Steel 410 & 416	-0.25 thru -035	
Nickel	-0.1 thru -0.2	
Stainless Steel 302 & 304	0.0 thru -0.1	
Titanium	0.05 thru -0.15	
Gold / Platinum	0.2 thru 0.1	Most Noble

Designer note:
This document describes the essential system components. In addition, hardware may be added or subtracted from the system based on engineering needs and as depicted in QCF formally submitted shop drawings.

QC*glass*

G-WINDOW SILL (vertical application)

GLAZING BY OTHERS
OPTIONAL **QC***iso* FRAMING BREAK
QC*hook* CARRIER (GROUP C)
FASTENERS BY OTHERS
QC*glass* CHANNEL (GROUP A)
QC*pin* BLOCK (GROUP B)
QC*frame* "L" SUPPORT (GROUP D)
SHEATHING BY OTHERS
MOISTURE BARRIER OTHERS

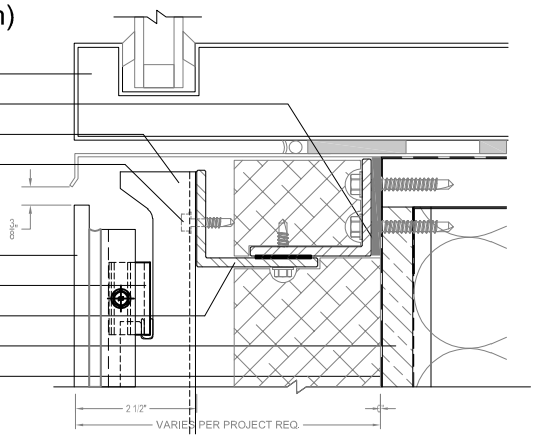

H-INSIDE CORNER (vertical application)

FRAMING BY OTHERS
SHEATHING BY OTHERS
MOISTURE BARRIER OTHERS
EXTERIOR INSULATION OTHERS
OPTIONAL **QC***iso* FRAMING BREAK
FASTENERS BY OTHERS
QC*frame* "L" SUPPORT (GROUP D)
QC*hook* CARRIER (GROUP C)
QC*pin* BLOCK (GROUP B)
QC*glass* PANEL (HP SYSTEM)
QC*hook* CARRIER (GROUP C)
FASTENERS BY OTHERS
QC*glass* PANEL (HP SYSTEM)
QC*pin* BLOCK (GROUP B)

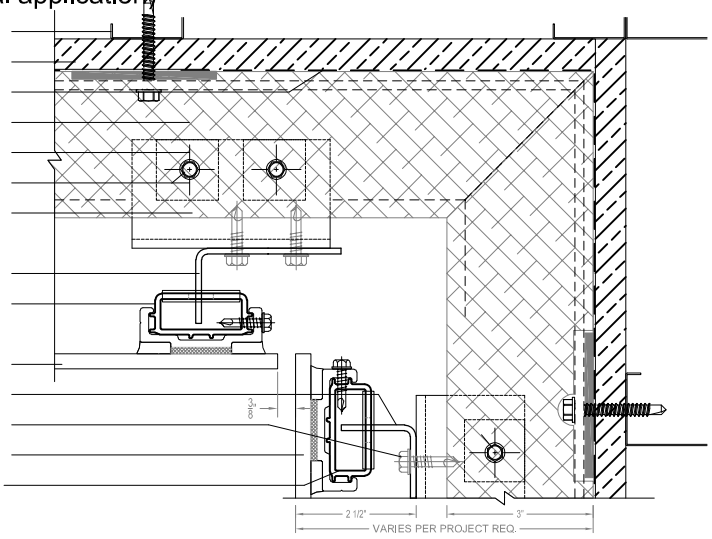

J-OUTSIDE CORNER (vertical application)

OPTIONAL **QC***iso* WALL BREAK
OPTIONAL **QC***iso* FRAMING BREAK
QC*frame* "L" SUPPORT (GROUP D)
QC*hook* CARRIER (GROUP C)
QC*pin* BLOCK (GROUP B)
FASTENERS BY OTHERS
SHEATHING BY OTHERS
MOISTURE BARRIER BY OTHERS
QC*glass* CHANNEL (GROUP A)
AIR SPACE MIN 1"
QC*frame* "L" SUPPORT (GROUP D)
QC*hook* CARRIER (GROUP C)
QC*pin* BLOCK (GROUP B)
QC*glass* CHANNEL (GROUP A)

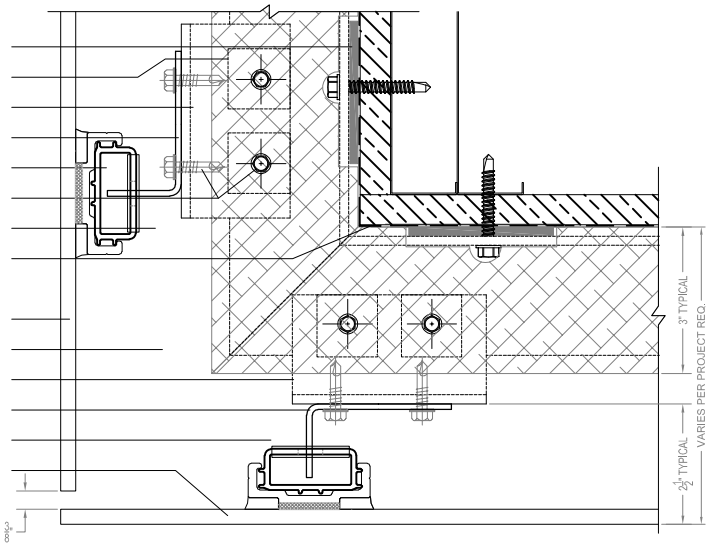

QC*GLASShp* Panel (Group A)
QC*GLASShp* Channel (Group A)



QC*pin* Block (Group B)



QC*hook* Carrier (Group C)

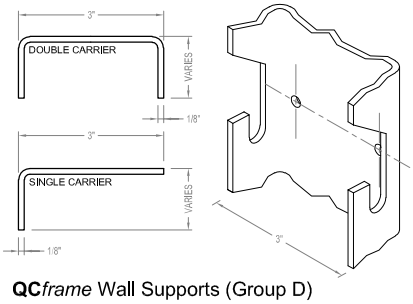

QC*frame* Wall Supports (Group D)



QC*iso* Thermal Break (Group E)





NOBLE SCALE		
Magnesium	-1.6 thru -1.7	Least Noble
Zinc	-1.0 thru -1.1	Most compatible to Aluminum
Aluminum	-0.75 thru -1.0	
Mild Steel	-0.6 thru -0.7	
Copper	-0.3 thru -0.4	
Stainless Steel 410 & 416	-0.25 thru -035	
Nickel	-0.1 thru -0.2	
Stainless Steel 302 & 304	0.0 thru -0.1	
Titanium	0.05 thru -0.15	
Gold / Platinum	0.2 thru 0.1	Most Noble

Designer note:
This document describes the essential system components. In addition, hardware may be added or subtracted from the system based on engineering needs and as depicted in QCF formally submitted shop drawings.