QC*300*

Hook+Pin CE-02 QC300 2026

A - HORIZONTAL JOINT (vertical panel application)

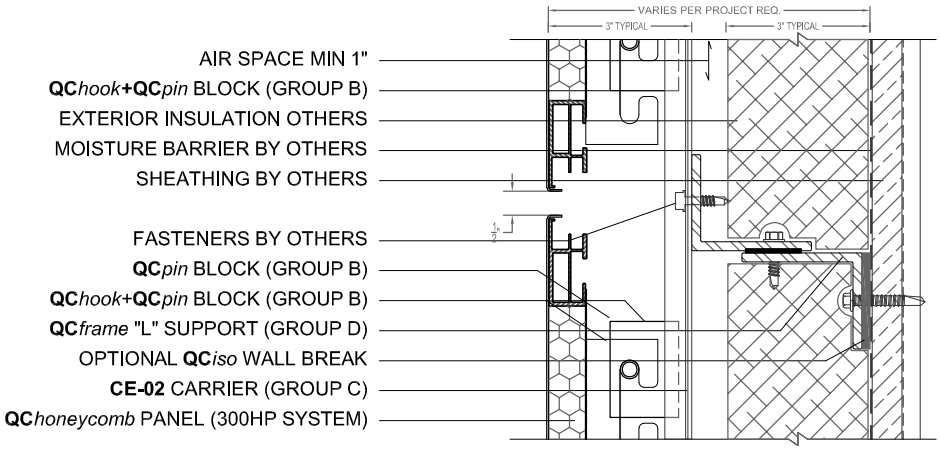

B - VERTICAL JOINT (vertical panel application)

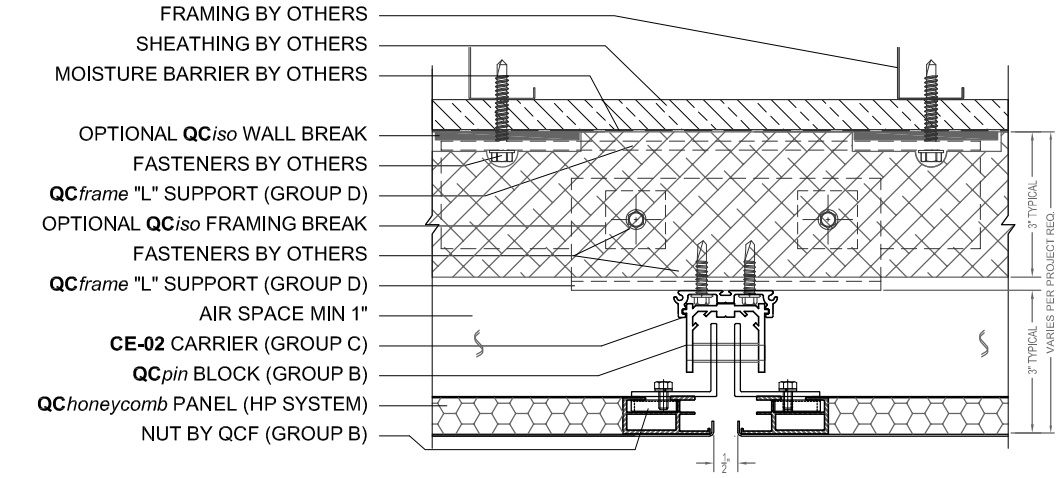

QC*honeycomb* Panel (Group A)



QC*pin* Block + QC*hook* (Group B)

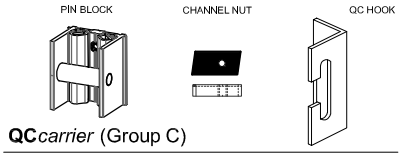

QC*carrier* (Group C)



QC*frame* Wall Supports (Group D)



QC*iso* Thermal Break (Group E)

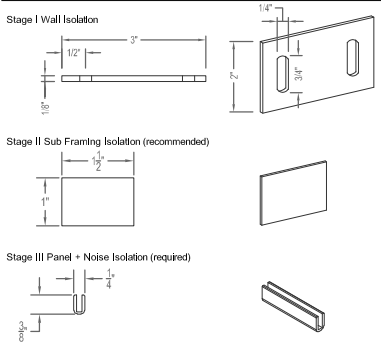

NOBLE SCALE		
Magnesium	-1.6 thru -1.7	Least Noble
Zinc	-1.0 thru -1.1	Most compatible to Aluminum
Aluminum	-0.75 thru -1.0	
Mild Steel	-0.6 thru -0.7	
Copper	-0.3 thru -0.4	
Stainless Steel 410 & 416	-0.25 thru -035	
Nickel	-0.1 thru -0.2	
Stainless Steel 302 & 304	0.0 thru -0.1	
Titanium	0.05 thru -0.15	
Gold / Platinum	0.2 thru 0.1	Most Noble

Designer note:
This document describes the essential system components. In addition, hardware may be added or subtracted from the system based on engineering needs and as depicted in QCF formally submitted shop drawings.

QC*honeycomb* Panel - Additional associated assembly parts

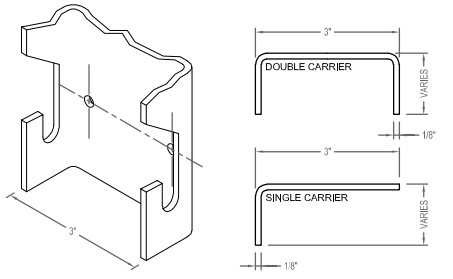

QC*hook (wall mount)*



Alternate carrier supports





QC*300*

Hook+Pin CE-02 QC300 2026

D-BOTTOM OF WALL (vertical panel application)

FRAMING BY OTHERS
SHEATHING BY OTHERS
MOISTURE BARRIER BY OTHERS
EXTERIOR INSULATION OTHERS
AIR SPACE MIN 1"
QC*frame* "L" SUPPORT (GROUP D)
OPTIONAL **QC***iso* FRAMING BREAK
QC*pin*+**QC***hook* BLOCK (GROUP B)
FASTENERS BY OTHERS
OPTIONAL **QC***iso* WALL BREAK
QC*honeycomb* PANEL (HP SYSTEM)

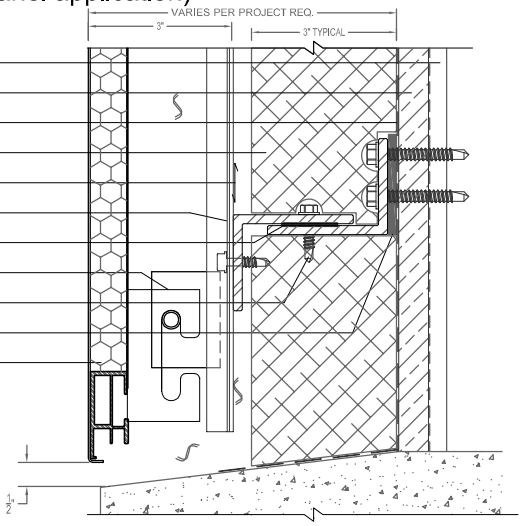

D-BOTTOM OF WALL (vertical panel application)

MOISTURE BARRIER BY OTHERS
SHEATHING BY OTHERS
FRAMING BY OTHERS
AIR SPACE MIN 1"
OPTIONAL **QC***iso* FRAMING BREAK
QC*frame* "L" SUPPORT (GROUP D)
CE-02 CARRIER (GROUP C)
FASTENERS BY OTHERS
QC*honeycomb* PANEL (HP SYSTEM)
OPTIONAL **QC***iso* WALL BREAK
QC*pin*+**QC***hook* BLOCK (GROUP B)
EXTERIOR INSULATION OTHERS

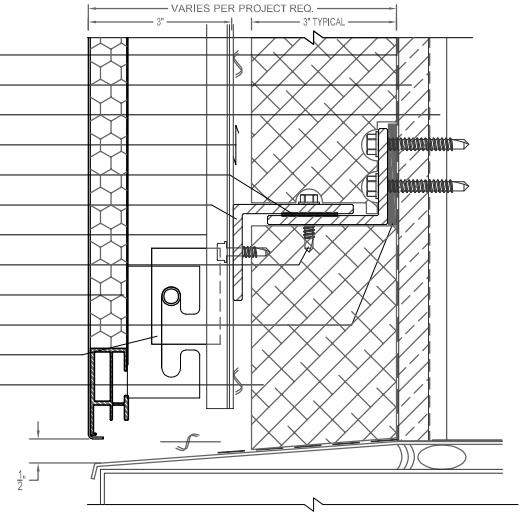

F-WINDOW JAMB (horizontal application)

FRAMING BY OTHERS
SHEATHING BY OTHERS
MOISTURE BARRIER BY OTHERS
OPTIONAL **QC***iso* WALL BREAK
FASTENERS BY OTHERS
EXTERIOR INSULATION OTHERS
OPTIONAL **QC***iso* FRAMING BREAK
QC*frame* "L" SUPPORT (GROUP D)
QC*pin* BLOCK (GROUP B)
QC*hook* BLOCK (GROUP B)
AIR SPACE MIN 1"
NUT BY QCF (GROUP B)
QC*honeycomb* PANEL (HP SYSTEM)

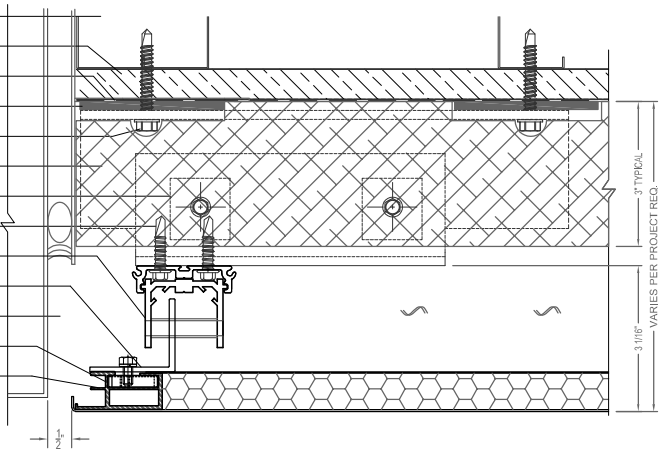

QC*honeycomb* Panel (Group A)



QC*pin* Block + **QC***hook* (Group B)

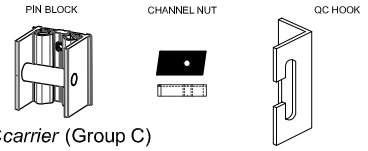

QC*carrier* (Group C)



QC*frame* Wall Supports (Group D)



QC*iso* Thermal Break (Group E)

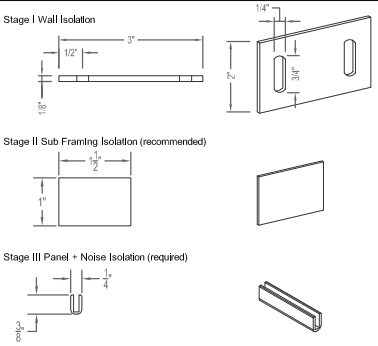

NOBLE SCALE		
Magnesium	-1.6 thru -1.7	Least Noble
Zinc	-1.0 thru -1.1	Most compatible to Aluminum
Aluminum	-0.75 thru -1.0	
Mild Steel	-0.6 thru -0.7	
Copper	-0.3 thru -0.4	
Stainless Steel 410 & 416	-0.25 thru -035	
Nickel	-0,1 thru -0,2	
Stainless Steel 302 & 304	0,0 thru -0,1	
Titanium	0.05 thru -0.15	
Gold / Platinum	0.2 thru 0.1	Most Noble

Designer note:
This document describes the essential system components. In addition, hardware may be added or subtracted from the system based on engineering needs and as depicted in QCF formally submitted shop drawings.

QC*300*

2026

G-WINDOW SILL (vertical application)

GLAZING BY OTHERS
OPTIONAL **QC***iso* FRAMING BREAK
QC*hook* CARRIER (GROUP C)
FASTENERS BY OTHERS

QC*honeycomb* PANEL (HP SYSTEM)
QC*hook***+QC***pin* BLOCK (GROUP B)
NUT BY QCF (GROUP B)
QC*frame* "L" SUPPORT (GROUP D)
SHEATHING BY OTHERS
MOISTURE BARRIER OTHERS

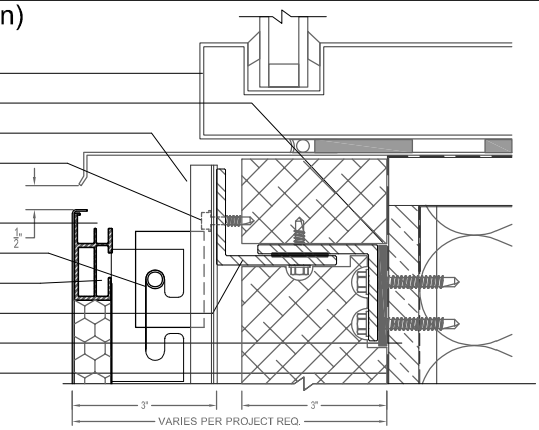

H-INSIDE CORNER (vertical application)

FRAMING BY OTHERS
SHEATHING BY OTHERS
MOISTURE BARRIER OTHERS
EXTERIOR INSULATION OTHERS
OPTIONAL **QC***iso* FRAMING BREAK
FASTENERS BY OTHERS
QC*frame* "L" SUPPORT (GROUP D)

QCE-02 CARRIER (GROUP C)
QC*pin***+QC***hook* BLOCK (GROUP B)

QC*honeycomb* PANEL (HP SYSTEM)
CE-02 CARRIER (GROUP C)
FASTENERS BY OTHERS
QC*honeycomb* PANEL (HP SYSTEM)
QC*hook***+QC***pin* BLOCK (GROUP B)

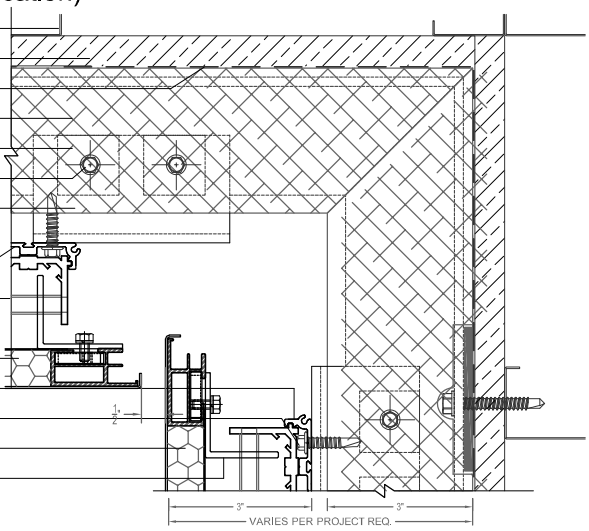

J-OUTSIDE CORNER (vertical application)

QC*honeycomb* (GROUP A)
OPTIONAL **QC***iso* WALL BREAK
QC*frame* "L" SUPPORT (GROUP D)
AIR SPACE MIN 1"
SHEATHING BY OTHERS
MOISTURE BARRIER BY OTHERS
FASTENERS BY OTHERS

OPTIONAL **QC***iso* FRAMING BREAK
CE-02 CARRIER (GROUP C)
QC*honeycomb* PANEL (HP SYSTEM)
QC*hook***+QC***pin* BLOCK (GROUP B)
QC*frame* "L" SUPPORT (GROUP D)
CE-02 CARRIER (GROUP C)
QC*hook***+QC***pin* BLOCK (GROUP B)

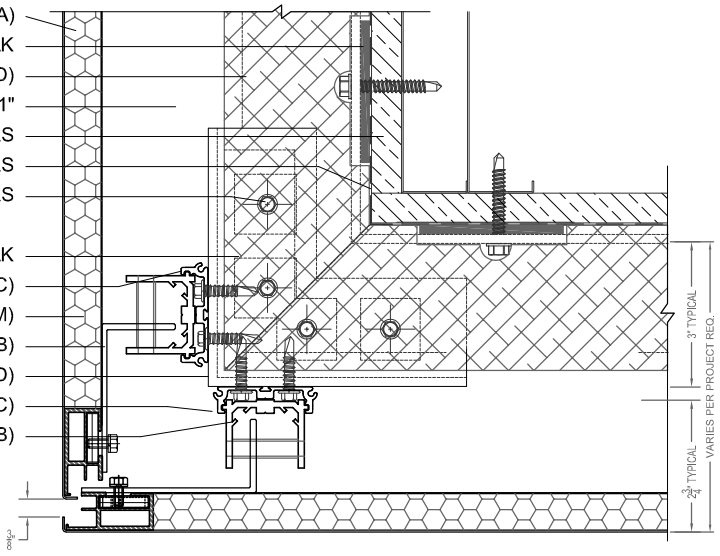

QC*honeycomb* Panel (Group A)



QC*pin* Block + **QC***hook* (Group B)



QC*carrier* (Group C)



QC*frame* Wall Supports (Group D)



QC*iso* Thermal Break (Group E)

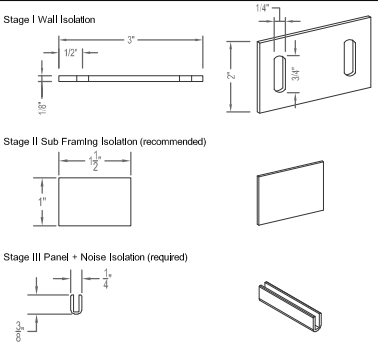

NOBLE SCALE		
Magnesium	-1.6 thru -1.7	Least Noble
Zinc	-1.0 thru -1.1	Most compatible to Aluminum
Aluminum	-0.75 thru -1.0	
Mild Steel	-0.6 thru -0.7	
Copper	-0.3 thru -0.4	
Stainless Steel 410 & 416	-0.25 thru -035	
Nickel	-0,1 thru -0,2	
Stainless Steel 302 & 304	0,0 thru -0,1	
Titanium	0.05 thru -0.15	
Gold / Platinum	0.2 thru 0.1	Most Noble

Designer note:
This document describes the essential system components. In addition, hardware may be added or subtracted from the system based on engineering needs and as depicted in QCF formally submitted shop drawings.